
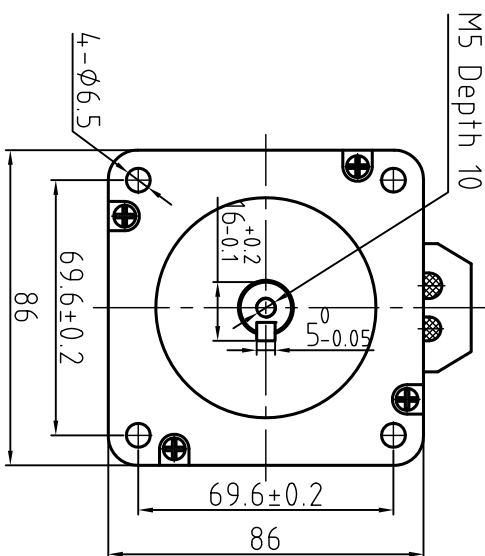


Dimension: (Unit: mm)

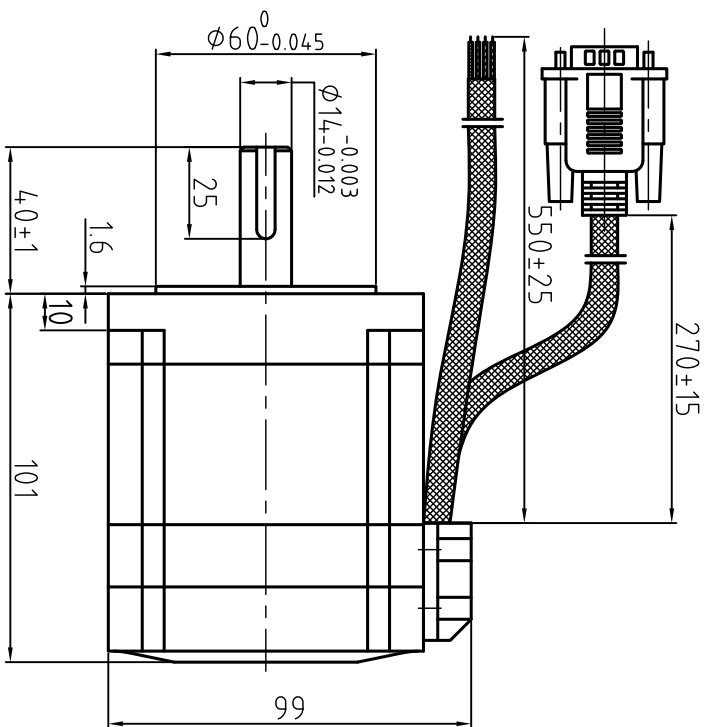


Common Rating

Step angle	18°
Position accuracy	18±0.09°
Dielectric strength	1000VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 4.50g)
Axial play	Max:0.08mm(Load 900g)


Specification

Current/phase	4.0 A
Voltage	2 V
DC Resistance/phase	±10% 0.4,7 Ω
Inductance/phase	±20% 3.6 mH
Holding torque	4 N·M
Inertia	1.95 kg·cm ²
Weight	2.7 kg
Encoder Resolution	1000 cpr

Motor Connctions

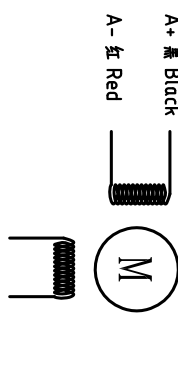

Encoder Signals



PIN	1	2	3	11	12	13
颜色	黑	红	白	黄	绿	蓝
定义	A+	VCC	GND	B+	B-	A-

设计 Designed	日期 Date	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked		第一角画法 First Angle projection	混合伺服电机
批准 Approved		重量/比例 Weight/Scale	86HBM4.0-1000
图号 Part No.		共 1 套 第 1 套 Sheet 1 of 1	图号 DWG. NO. LS-HBM86-02-5011-01

版本 Rev	日期 Date	变更文件号 ECR NO.	变更内容 Revisions	设计 By
V1.0	14.6.21		初版	王平
V1.1	14.9.9		改进丝印编程	王平